



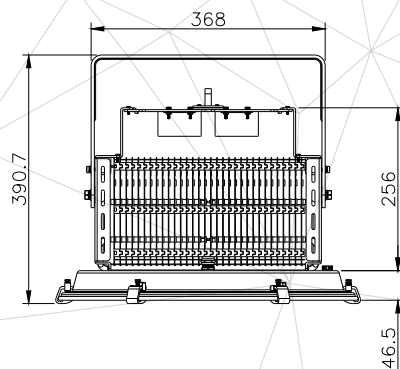




500 w





FLOOD LIGHT LENSE

Taşkın Işık lense






Product Information

Ürün Bilgisi

Product Name Ürün Adı	Part Number Parti/Parça Numarası	Materials malzemeler	Mounting montaj	Power Güç	Color Rendering Index(CRI) Renkssel geriverim
Flood Light Lense Taşkın Işık lense	NSLL-FL500W-XW-T3S-6000K NSLL-FL500W-XW-T3S-4000K NSLL-FL500W-XW-T3S-3000K	Aluminum+PC Alüminyum + Bilgisayar	- Post side mounted column/wall by using special support - Özel destek kullanarak yan monte sütun / duvar	500 Watt 500 Vat	80%
beam angle Hüzme/Demet Açısı	Working temperature Çalışma Isısı	IP rating IP Koruma Derecesi	Lifespan Yaşam Süresi	Warrenty Garanti Süresi	Lumen/Watt Lümen/Vat
80 : 94	-40 +70°	IP65	50,000 Hrs 50,000 Saat	Long Period uzun dönem	102.91
Input Voltage Giriş Gerilimi	Power Factor Correction (PFC) güç Faktörü düzeltmesi	LEDs	Flux Akış	color temperature(CCT) renk sıcaklığı	Dimensions Boyutlar
100-240V AC 50-63Hz	>.90	SMD OR COB	49309 Lum	6000/4000/3000	L390.7 W368 H256

Photometric

Fotometrik

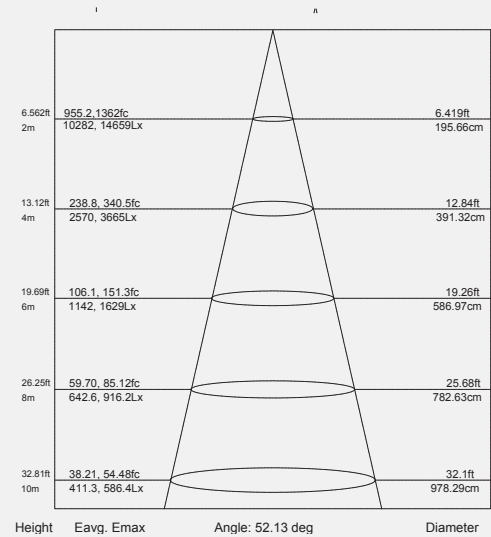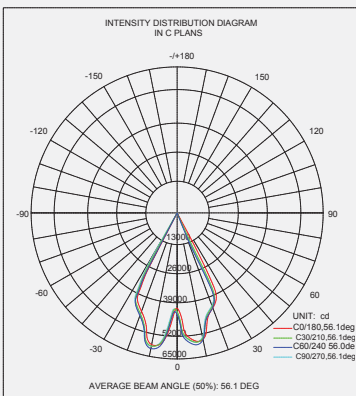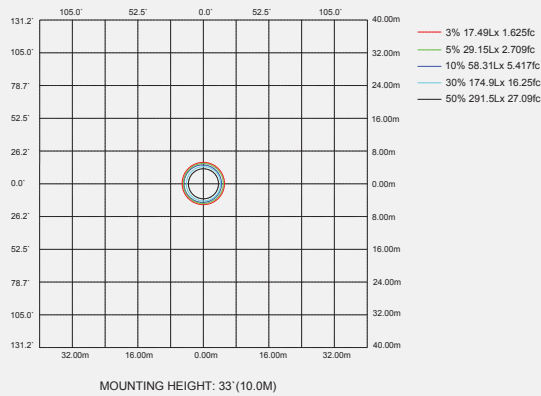

Order Code Sipariş Kodu	Color Tempreature Renk sıcaklığı	Power Güç	Size(cm) Boyut(cm)
NSLL-FL500W-XW-T3S-6000K	6000k	500	L390.7 W368 H256
NSLL-FL500W-XW-T3S-4000K	4000K	500	L390.7 W368 H256
NSLL-FL500W-XW-T3S-3000K	3000K	500	L390.7 W368 H256